

Данные о продуктовой линейке POWERSTAR HQI-E coated

Металлогалогенные лампы с кварцевой горелкой для закрытых светильников



- Factories and workshops Exhibition halls and trade fairs
Sports halls and multi-purpose halls Approved only for use
in enclosed luminaires Outdoor applications only in suitable
luminaires

- Long lifetime E40 screw base for simple lamp handling UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter
- Product features POWERSTAR® quartz technology Light colors: neutral white (NDL), daylight (D) Product benefits Long lifetime E40 screw base for simple lamp handling UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter Areas of application Factories and workshops Exhibition halls and trade fairs Sports halls and multi-purpose halls Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires



Данные о продуктовой линейке

Technical data

Описание продукта	Электрические параметры			Фотометрические данные			
	ZLDV_Nominal wattage [AGGR]	ZLDV_Rated wattage [AGGR]	ZLDV_Nominal current [AGGR]	ZLDV_Rated luminous flux [AGGR]	ZLDV_Color rendering index Ra [AGGR]	ZLDV_Color temperature [AGGR]	ZLDV_Nominal luminous flux [AGGR]
HQI-E 250 W/N/SI CO ¹⁾	250.00 W	235.00 W	2.1 A	20500 lm	69	4000 K	20500 lm
HQI-E 250 W/D PRO			3 A				
HQI-E 400 W/D PRO ²⁾			4 A				

Описание продукта	ZLDV_Light color (designation) [AGGR]	Размеры и вес				Дополнительные данные	
		ZLDV_Diameter [AGGR]	ZLDV_Length [AGGR]	ZLDV_Product weight [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Overall length [AGGR]	ZLDV_Base (standard designation) [AGGR]
HQI-E 250 W/N/SI CO ¹⁾	Neutral White	90.0 mm	216.0 mm	161.10 g	BT89		E40
HQI-E 250 W/D PRO				160.00 g		226.00 mm	
HQI-E 400 W/D PRO ²⁾				230.00 g		290.00 mm	

Описание продукта	ZLDV_Product remark [AGGR]	ZLDV_Mercury-free [AGGR]	ZLDV_Dimmable [AGGR]	Возможности / мощности		Сертификаты и Стандарты		Классификация	Environmental information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
				ZLDV_Energy efficiency class [AGGR]	ZLDV_Energy consumption [AGGR]	ZLDV_Order reference [AGGR]	Date of Declaration		
HQI-E 250 W/N/SI CO ¹⁾	Lamp ignites at an ignition voltage of 0.9...1.3 kVs; lamps must not be operated with 4...5 kV igniters	No	No	A	275 kWh/1000h	HQI-E 250W/N/SI	18-04-2022		

Данные о продуктовой линейке


			Возможности / мощности	Сертификаты и Стандарты		Классификация	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
Описание продукта	ZLDV_Product remark [AGGR]	ZLDV_Mercury-free [AGGR]	ZLDV_Dimmable [AGGR]	ZLDV_Energy efficiency class [AGGR]	ZLDV_Energy consumption [AGGR]	ZLDV_Order reference [AGGR]	Date of Declaration
HQI-E 250 W/D PRO				G	260.00 kWh/1000h		18-04-2022
HQI-E 400 W/D PRO ²⁾	With NAV control gear			G	430.00 kWh/1000h		18-04-2022

Описание продукта	Primary Article Identifier	Declaration No. in SCIP database
HQI-E 250 W/N/SI CO ¹⁾	4050300444628	In work
HQI-E 250 W/D PRO	4008321677907	In work
HQI-E 400 W/D PRO ²⁾	4008321677884	In work


¹⁾ Напряжение зажигания лампы 0,9 ... 1,3 КВт, недопустимо использование при напряжении 4... 5 КВт

²⁾ С NAV ПРА


Данные о продуктовой линейке

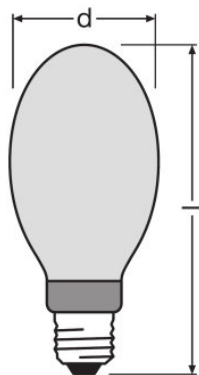

HQI-E 250 W/N/SI CO, HQI-E 250 W/D PRO, HQI-E 400 W/D PRO

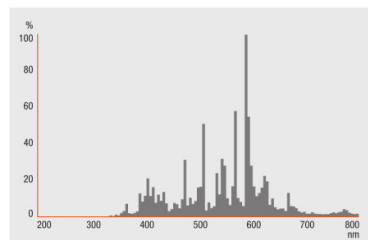

HQI-E 250 W/N/SI CO

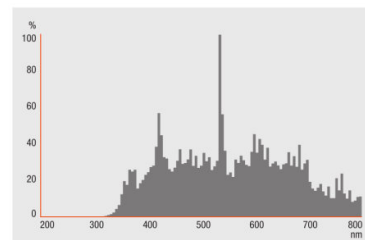

HQI-E 250 W/D PRO, HQI-E 400 W/D PRO

Рекомендации по применению

Для получения дополнительной информации и изображения продукции, пожалуйста, ознакомьтесь с инструкцией.

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Данные о продуктовой линейке

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4050300444628	HQI-E 250 W/N/SI CO	Shipping carton box 6	348 mm x 250 mm x 238 mm	20.71 дм³	1546.00 g
4008321677907	HQI-E 250 W/D PRO	Shipping carton box 12	426 mm x 252 mm x 331 mm	35.53 дм³	2879.00 g
4008321677884	HQI-E 400 W/D PRO	Shipping carton box 12	541 mm x 317 mm x 416 mm	71.34 дм³	4239.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Примечание

В заказ могут быть внесены изменения без предварительного уведомления. Проверьте информацию на наличие ошибок. Убедитесь, что информация актуальна.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany